


Under Cabinet Fixture Outlet and USB Charger

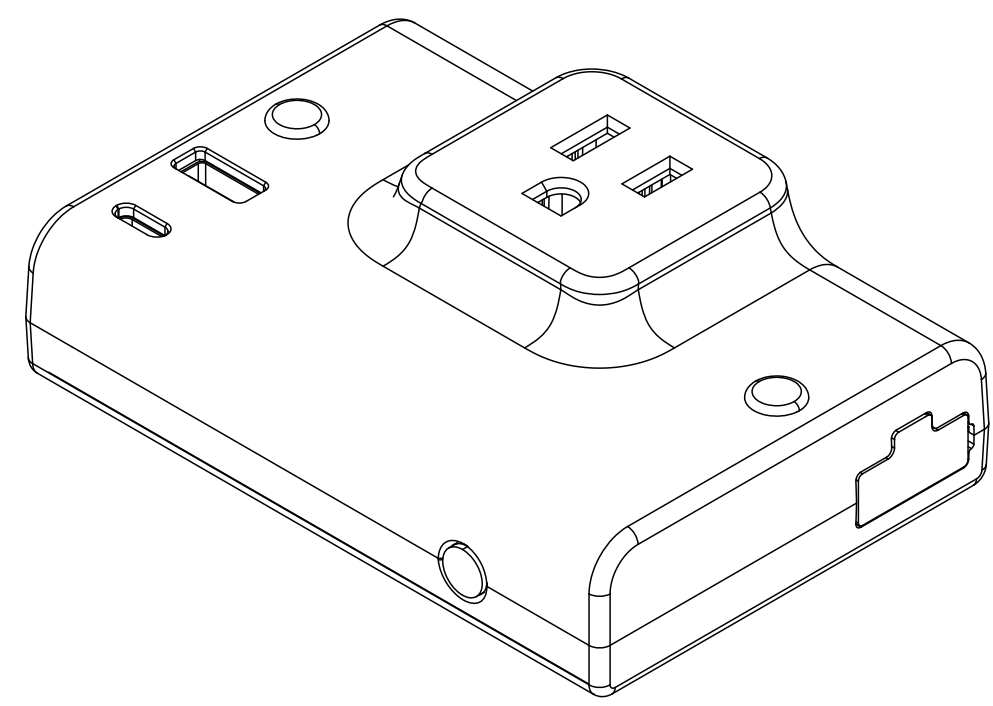

GE Lighting, a Savant Company • 1-800-435-4448 • www.gelighting.com
GE is a trademark of General Electric Company. Used under trademark license.
INFORMATION PROVIDED IS SUBJECT TO CHANGE WITHOUT NOTICE. ALL VALUES ARE
DESIGN OR TYPICAL VALUES WHEN MEASURED UNDER LABORATORY CONDITIONS.
©2021 GE Lighting, a Savant Company.

PRODUCT SPECIFICATION			
Model	Input Voltage	Input Current	Input Wattage
UNCAC-DW-WTLAF	120VAC, 60Hz	MAX 6A	MAX 720W
Outlet	Output voltage	Output Current	Output Wattage
	120VAC, 60Hz	MAX 4.17A	MAX 500W
USB Output	MAX 18W in total		
USB-A Output	5V 3A / 9V 2A / 12V 1.5A		
USB-C Output	5V 3A / 9V 2A / 12V 1.5A		

Note: when USB-A and USB-C work simultaneously, both ports output is 5V.

- Outlet
- Installation hole cover
- Pre-installed mounting screw
- USB-A
- USB-C
- Input /Output Port
- Receptacle cap
- Overload protection reset button

STOP BEFORE YOU BEGIN
Read these instructions completely and carefully.

WARNING


- DO NOT USE WITH DIMMERS
- MAXIMUM 1 OUTLET PER CIRCUIT
- OUTLET MAXIMUM 120V AC 500W
- ONLY INSTALL ON A GFCI PROTECTED CIRCUIT

Before using the USB charging function, please confirm that the input voltage and current of the charging device are compatible with this product.


PREPARE ELECTRICAL WIRING

- Electrical Requirements**
The LED fixture must be supplied with 120VAC 60Hz.
- Grounding Instructions**
The grounding and bonding of the overall system shall be done in accordance with National Electric Code (NEC) Article 600 and local codes.


PACKAGE CONTENTS

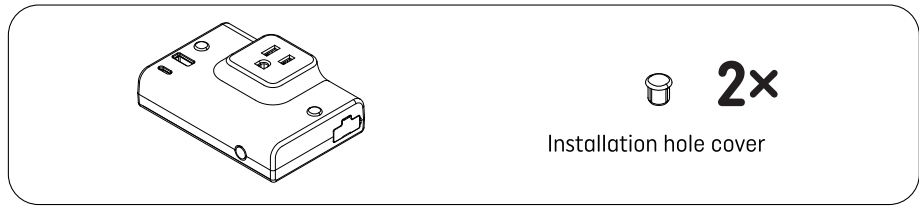


OTHER AVAILABLE ACCESSORIES

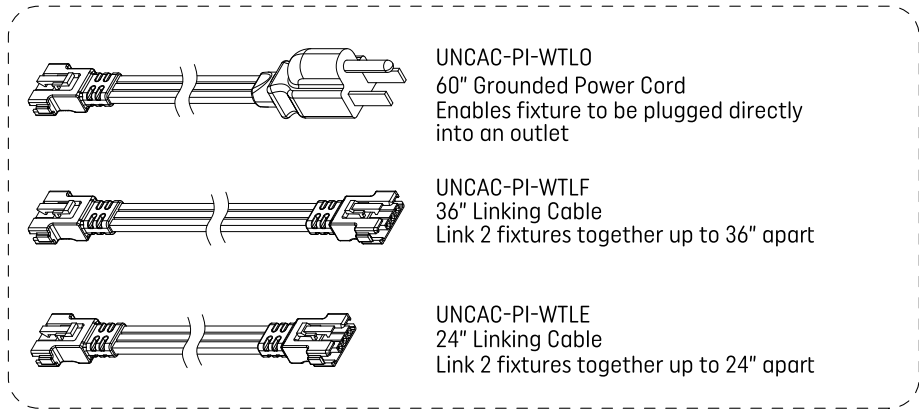

COMPATIBLE FIXTURES

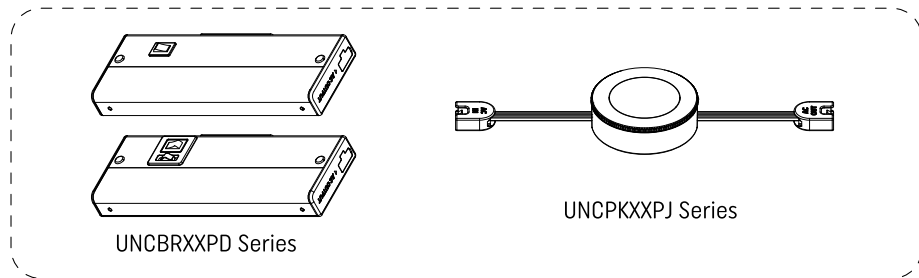


TOOLS REQUIRED

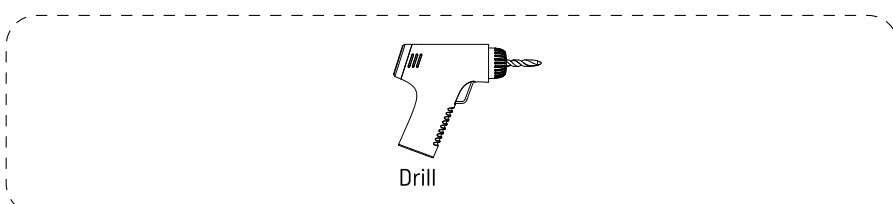


Note: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference ; (2) this device must accept any interference received, including interference that may cause undesired operation.

INSTALLATION

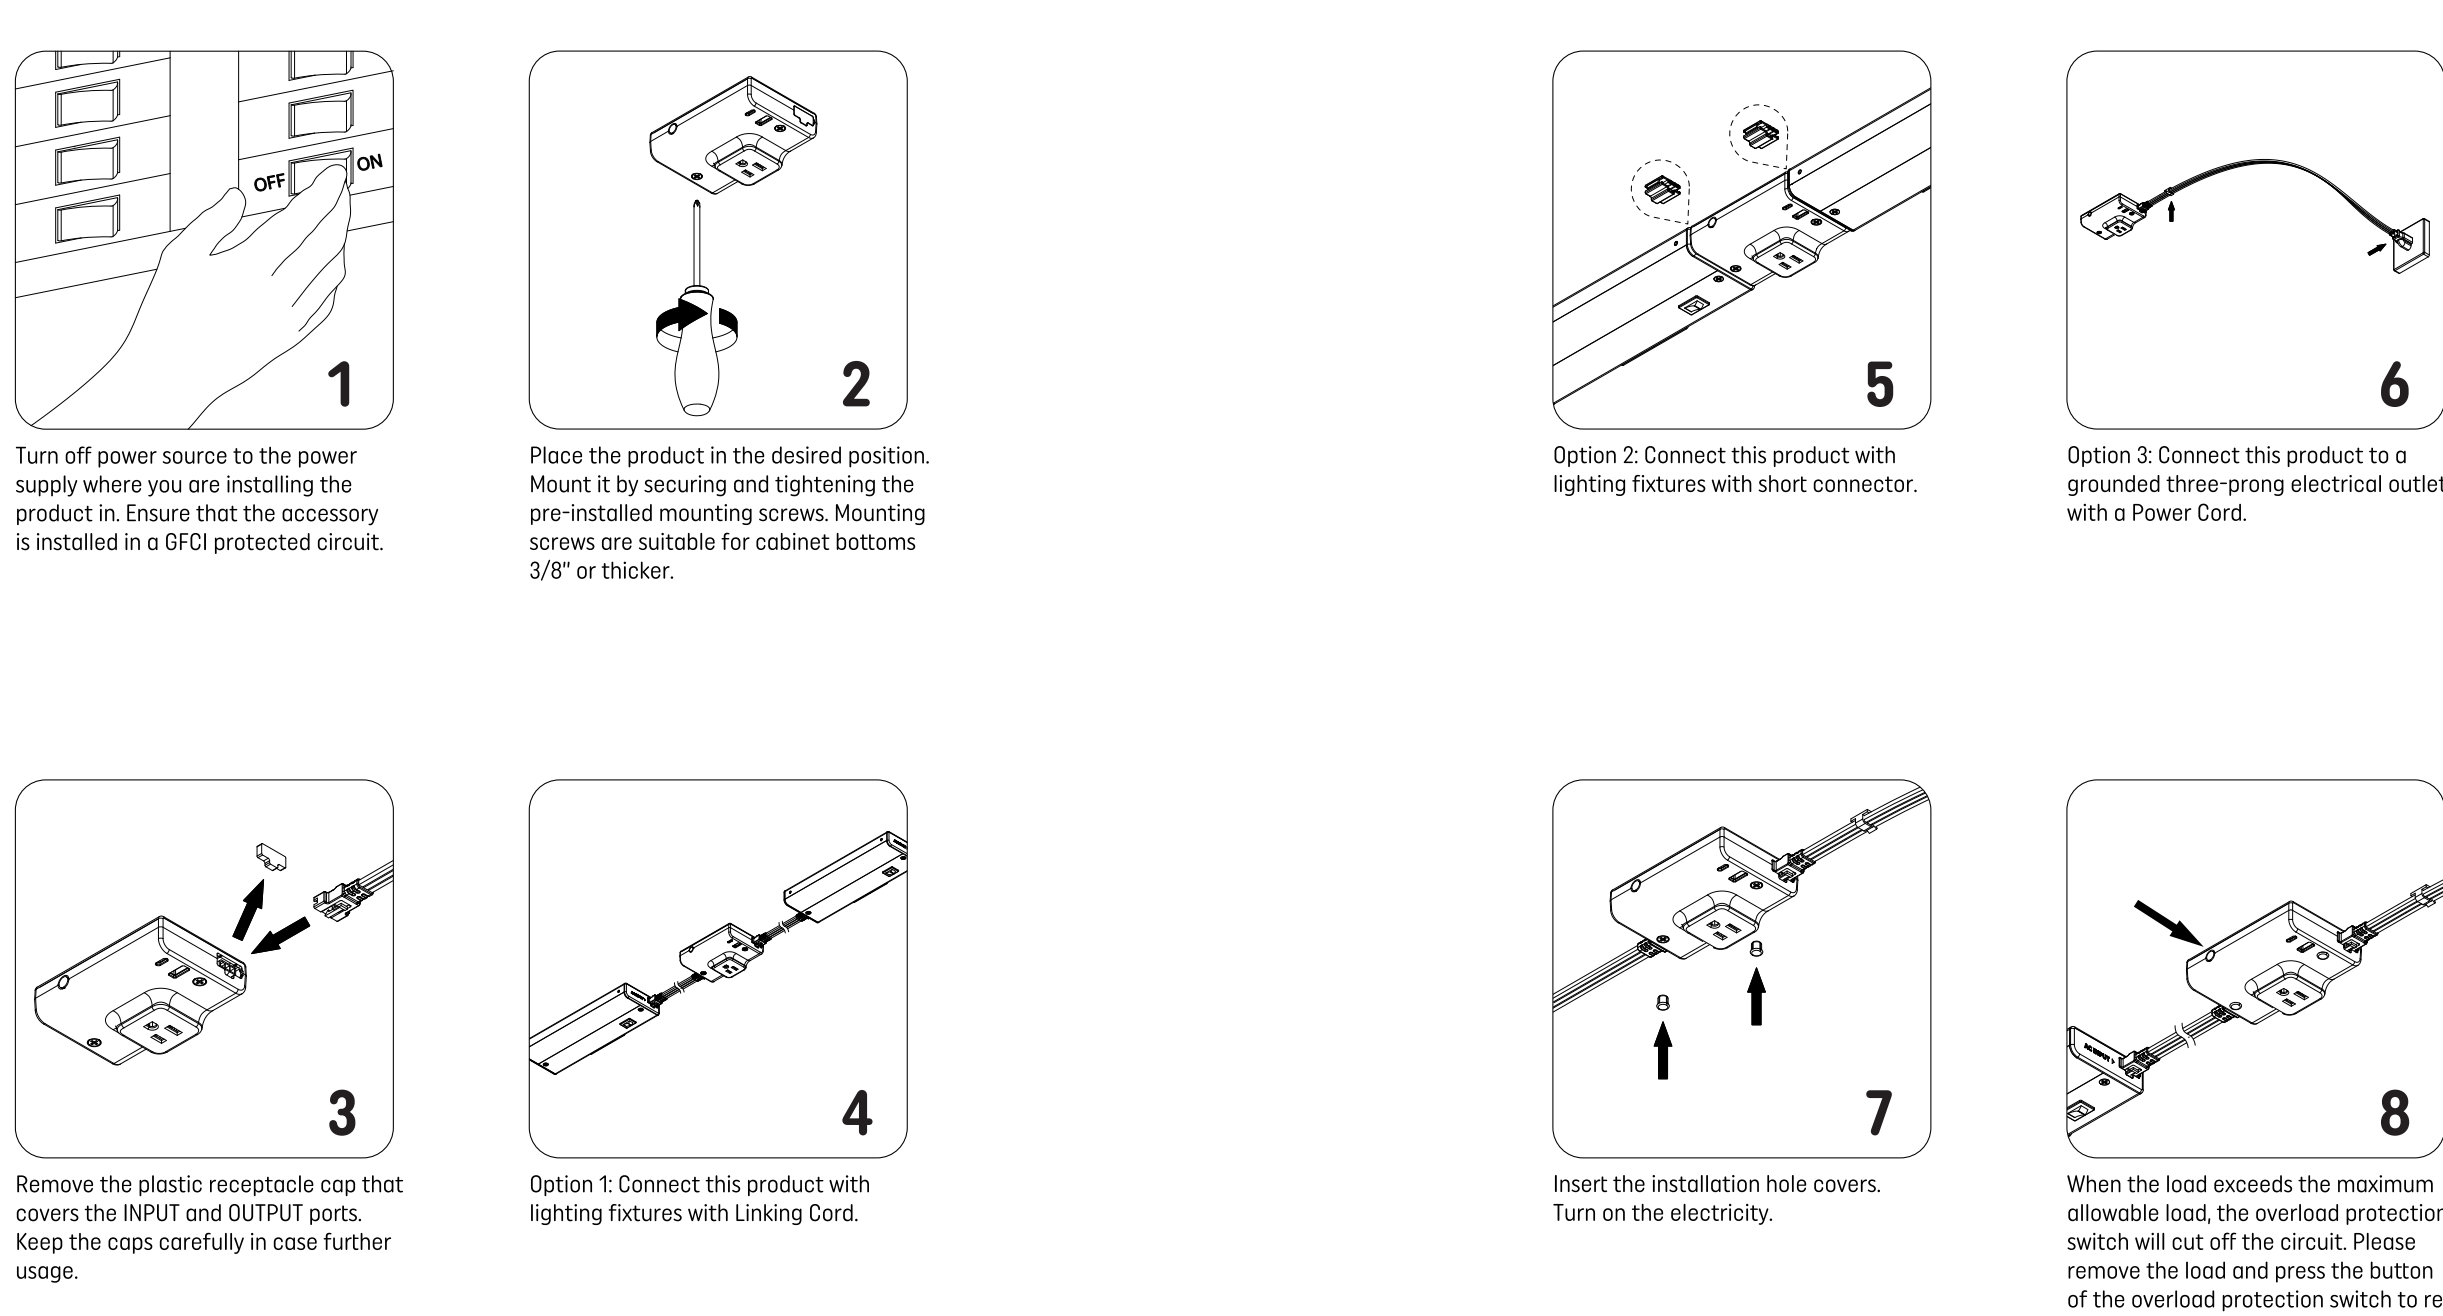

Luminaire sous les armoires Prise et chargeur USB

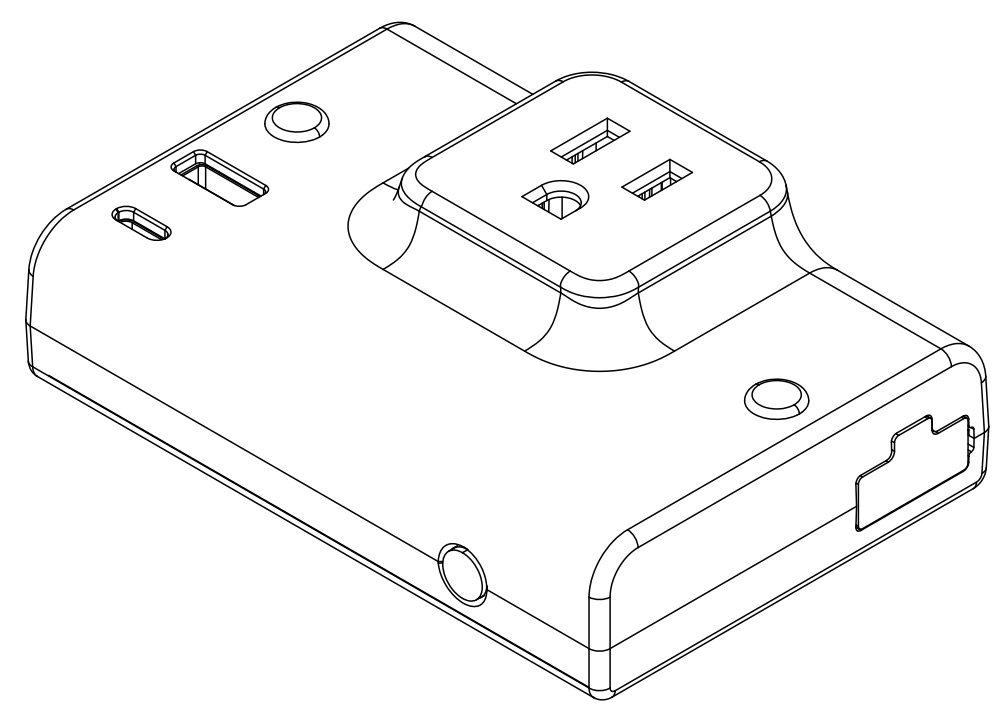

GE Lighting, a Savant Company • 1-800-435-4448 • www.gelighting.com
GE est une marque de commerce de General Electric Company. Utilisé sous licence de marque de commerce.
LES INFORMATIONS FOURNIES SONT SUJETTES À MODIFICATION SANS PRÉAVIS.
TOUTES LES VALEURS SONT DES VALEURS DE CONCEPTION OU TYPIQUES
LORSQU'ELLES SONT MESURÉES DANS DES CONDITIONS DE LABORATOIRE.
©2021 GE Lighting, a Savant Company.

SPÉCIFICATION DU PRODUIT

Modèle	Tension d'entrée :	Courant d'entrée :	Puissance d'entrée :
UNCAC-DW-WTLAF	120VCA, 60Hz	MAX 6A	MAX 720W
Prise	Tension de sortie :	Courant de sortie :	Puissance de sortie :
	120VCA, 60Hz	MAX 4.17A	MAX 500W
Sortie USB :	MAX 18W au total		
Sortie USB-A :	5V 3A / 9V 2A / 12V 1.5A		
Sortie USB-C :	5V 3A / 9V 2A / 12V 1.5A		

Remarque : lorsque les ports USB-A et USB-C fonctionnent simultanément, la sortie des deux ports est de 5 V.

- Prise
- Couvercle de trou d'installation
- Vis de fixation pré-installée
- USB-A
- USB-C
- Port d'entrée/de sortie
- Bouchon de réceptacle
- Bouton de réinitialisation de la protection contre les surcharges

ARRÊT AVANT DE COMMENCER
Veuillez lire ces instructions au complet et attentivement.

AVERTISSEMENT


- NE PAS UTILISER AVEC DES GRADATEURS
- MAXIMUM 1 PRISE PAR CIRCUIT
- PRISE MAX. 120 V c.a. 500 W
- INSTALLER UNIQUEMENT SUR UN CIRCUIT PROTÉGÉ PAR UN DISJONCTEUR DE FUITE À LA TERRE

Avant d'utiliser la fonction de chargement USB, vérifiez que la tension d'entrée et le courant du dispositif de chargement sont compatibles avec ce produit.


PRÉPARATION DU CÂBLAGE ÉLECTRIQUE

- Exigences en matière d'électricité**
Le luminaire DEL doit être alimenté avec du courant de 120 V c.a., 60Hz.
- Instructions de mise à la terre**
La mise à la terre et la continuité des masses du système général doivent être assurées conformément à l'article 600 de la norme du National Electric Code (NEC) et aux codes en vigueur localement.


CONTENU DE L'EMBALLAGE :

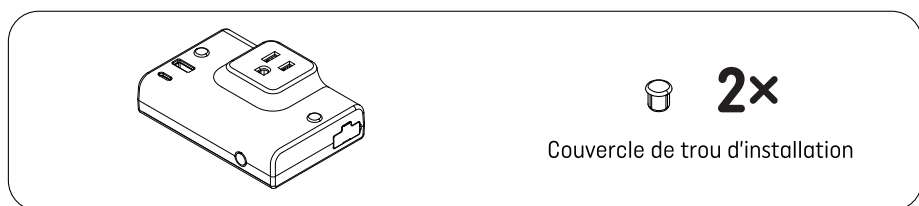


OTHER AVAILABLE ACCESSORIES

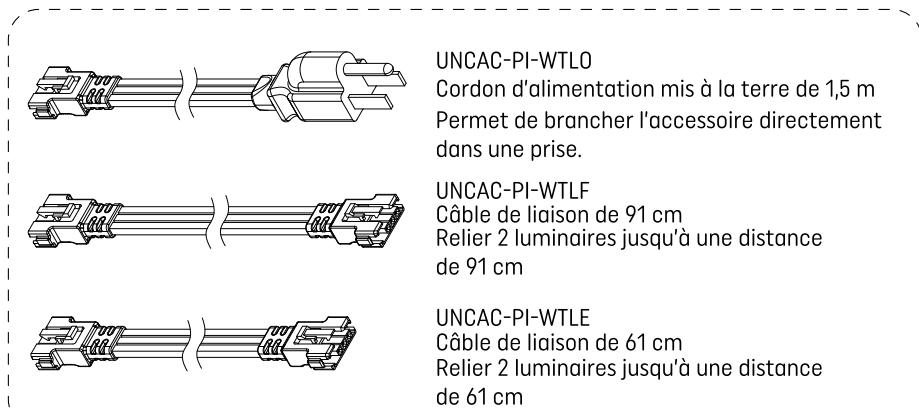

LUMINAIRES COMPATIBLES

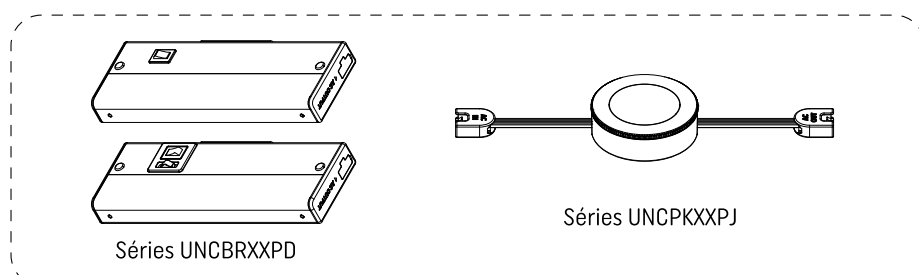

OUTILS NÉCESSAIRES :

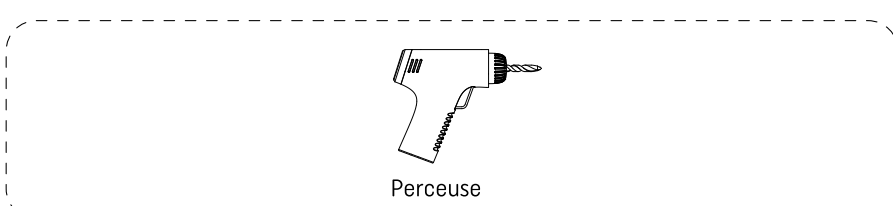

Remarque : Cet appareil est conforme à la partie 15 des règles de la FCC. Le fonctionnement est soumis aux deux conditions suivantes : (1) Cet appareil ne peut pas causer d'interférence nuisible; (2) Cet appareil doit accepter toute interférence reçue, y compris les interférences qui peuvent causer un fonctionnement indésirable.

INSTALLATION

