Dynamic Effects Indoor Light Strips and Extension Specifications



Box Contents



Light Strip

- (1) Dynamic Effects Indoor Light Strip
- (1) Reconnector
- (1) User Guide

Light Strip Extension (sold separately)

- (1) Dynamic Effects Indoor Light Strip Extension
- (1) Fixed Snap Connector
- (1) Conner Connector (1) User Guide

Specifications

| Device | | |
|--------------------------|---------------------|--------------------------------------|
| Light Strip | Description | CLEDSTR24CDIDP |
| | Input Voltage | 120V |
| | Life (Hours) | 25,000 |
| | Zone Number | 50 |
| | Color Mixing | RGBWW |
| | CCT Range | 2000-7000K (2000+7000K color mixing) |
| | Color Range | 16 Million Colors |
| Light Strip Extension | Description | CLEDSTX12CDIDP |
| | Zone Number | 20 |

| Dimensions and Weights | | | | | |
|------------------------|---------------|------------------|-----------------|-------------------|--|
| Light Strip | Length | Width | Height | Weight | |
| | 16ft (5m) | 0.47in (12mm) | 0.19in (5mm) | 0.97lbs (440g) | |
| Light Strip | Length | Width | Height | Weight | |
| Extension | 8ft (2.5m) | 0.47in (12mm) | 0.19in (5mm) | 0.37lbs (157g) | |

(2.5m)(12mm) (5mm) **Hardware**

| Operating Temperature | 32°F to 104°F (0°C to 40°C) |
|-----------------------------------|-----------------------------|
| Trimmable | Yes |
| Extendable | Yes, up to 40ft |
| LED Spacing | 1¹/₃in |
| Segment Size | 4in |
| Manufac. Process | Extrusion Glue |
| Environmental (Wet, Dry, Damp) | Dry |
| | |

Indoor

IP20

20dB @ 30cm

Indoor/Outdoor

Audible Noise

IP Rating

| Electrical | |
|---------------------------|-----------------------------------|
| Start Time | <1.5s |
| Power Factor | >0.5 |
| Power | 24W |
| Adapter Output Voltage | 14V |
| Adapter Output Current | 1.7A |
| Flicker | <30% @ 20% and 100% dimming level |

| С | | | |
|---|--|--|--|
| | | | |

Dimmable Yes

Dimmer Type Dimmable though Cync App, Cync Remotes and Cync Dimmers

Wireless

Wireless Protocol Wi-Fi (2.4 GHz) and BLE

Mobile Works with iOS 13 and above and Android 9

Compatibility and above


Voice Assistant Works with Google Home and Amazon Alexa Compatibility

Reliability and Warranty

| Warranty | 2 Years | | |
|----------------------------------|-----------------------|-----------------------------|--|
| Warranty Operating Conditions | Operating Voltage | 120Vac, 60Hz | |
| | Operating Temperature | 32°F to 104°F (0°C to 40°C) | |
| | Operating Humidity | RH < 80% 32°C | |

| Certifications | |
|-----------------------------|--------------------|
| Safety Listing | UL153 and cUL153 |
| Safety Listing (Adapter) | UL1310 and cUL1310 |
| Lighting Facts | Yes |

Device Overview

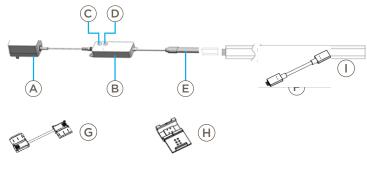

| A | Adapter |
|-----|---|
| B | Control box |
| (C) | On/Off Toggle Button - Press and hold for 10 seconds to factory reset the device. |

Light Show Modes - Cycles through the 9 preset Lights Shows. (Candlelight, Rainbow, Fireworks, Volcanic, Aurora, Happy Holidays, Red, White & Blue, Vegas, Party Time)

(E) Light Strip

Light Strip Extension - Sold separately.

Reconnector - Comes in box with Dynamic Effects Indoor Light Strip (G)

Fixed Snap Connector - Comes in box with Dynamic Effects Indoor Light Strip Extension Only

Conner Connector - Comes in box with Dynamic Effects Indoor Light Strip Extension Only