# **Direct Connect Light Strips (16ft) and Extension**Specifications



# **Box Contents**



Direct Connect Light Strip

(1) Direct Connect Light Strip - 16ft

• (1) User Guide

Direct Connect Light Strip Extension (1) Direct Connect Light Strip Extension

• (1) Fixed Snap Connector

(1) User Guide

## **Specifications**

Device				
	Description	CLEDSTR12CDIDB		
	Input Voltage	120V		
	Life (Hours)	15,000		
Light Strip	Zone Number	30		
	Color Mixing	RGBW		
	CCT Range	2000-7000K (4000K + RGB color mixing)		
	Color Range	16 Million		
Light Strip Extension	Description	CLEDSTX6CDIDB		
	Zone Number	15		
Dimensions and	d Weights			
	Length	Width	Height	Weight
Light Strip	16ft (5m)	0.47in (12mm)	0.19in (5mm)	0.82lbs (370g)
Light Strip	Length	Width	Height	Weight
Light Strip Extension	8ft (2.5m)	0.47in (12mm)	0.19in (5mm)	0.33lbs (150g)
Hardware				
Operating Temperature	32°F to 104°F (0°C to 40°C)			
Trimmable	Yes			
Extendable	Yes, up to 32ft			
LED Spacing	2.2in			
Segment Size	6.6in			
Manufac. Process	Extrusion Glue			
Environmental (Dry, Damp, Wet)	Dry			
Indoor/Outdoor	Indoor			
IP Rating	IP20			
Electrical				
Start Time	<1.5s			
Power Factor	>0.7			
Power	24W			
Adapter Output Voltage	12V			
Adapter Output Current	2A			
Flicker	<30% @ 20% an	d 100% dimmin	g level	
Audible Noise	20dB @ 30cm			

# Controls Dimmable Yes Dimmer Type Dimmable though Cync App, Cync Remotes and Cync Dimmers Wireless Yes Wireless Protocol Wi-Fi (2.4 GHz) and BLE Mobile Works with iOS 13 and above and Android 9 compatibility and above

Voice Assistant Works with Google Home and Amazon Alexa Compatibility


## **Reliability and Warranty**

Warranty	1 Year	
Warranty Operating Conditions	Operating Voltage	120Vac, 60Hz
	Operating Temperature	32°F to 104°F (0°C to 40°C)
	Operating Humidity	RH < 80% 32°C

### Certifications

Safety Listing	UL153 and cUL153	
Safety Listing (Adapter)	UL1310 and cUL1310	
Lighting Facts	Yes	

## **Device Overview**

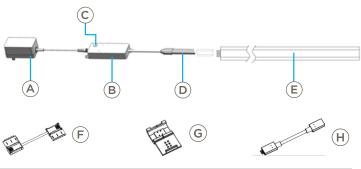

A	Adapter
B	Control box
<b>©</b>	On/Off Toggle Button - Press and hold for 10 seconds to factory reset the device.
D	Light Strip
E	Light Strip Extension - Sold separately.
F	Reconnector - Comes in box with Dynamic Effects Indoor Light Strip Only

G Fixed Snap Connector - Comes in box with Dynamic Effects Indoor Light Strip Extension Only

Conner Connector - Comes in box with Dynamic Effects Indoor Light
Strip Extension Only